
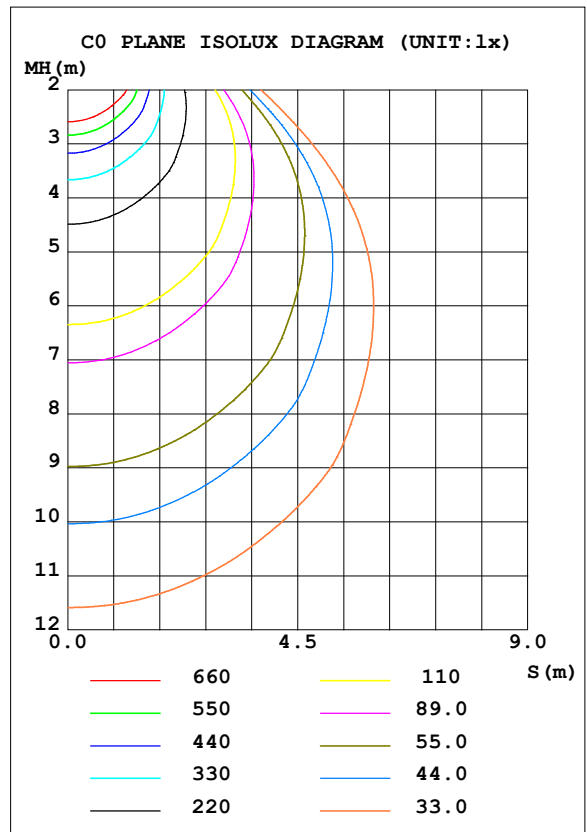


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.09 lm/W			
MHBL100W-C408-MOMX-P12-00B		I _{max} (cd)	4429	S/MH (C0/180)	1.35
NOMINAL POWER (W)	100W	LOR (%)	100.0	S/MH (C90/270)	1.35
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	12047	η UP, DN (C0-180)	0.4, 49.7
NOMINAL FLUX (lm)	12047.3	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 49.5
LAMPS INSIDE	1	η up (%)	0.8	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120.0	η down (%)	99.2	CIBSE SHR MAX	1.50

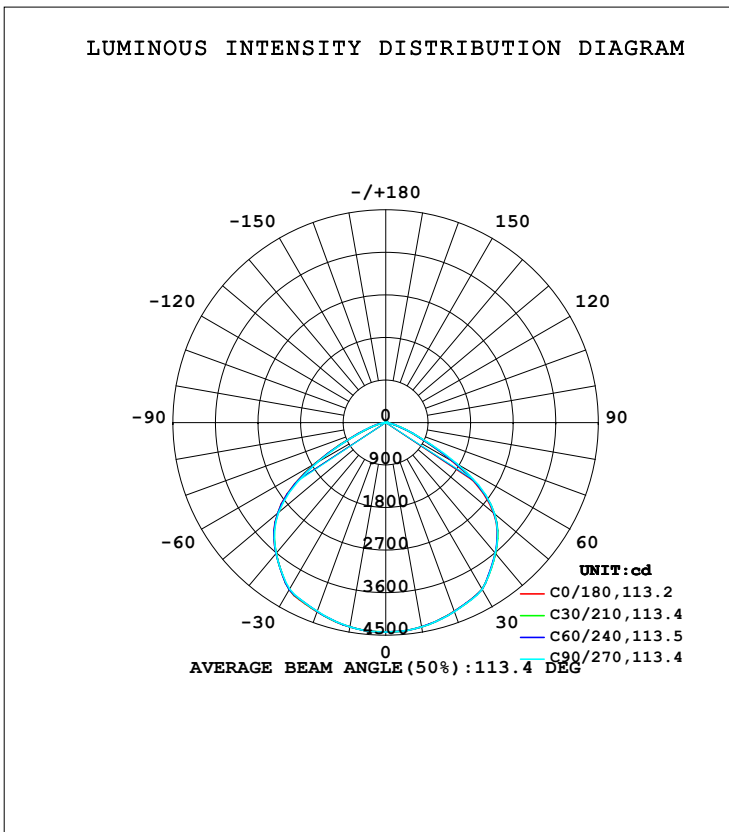

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Admin
 Test Date: 2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity: 65.0%
 Test Distance: 8.320m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4388	4388	4389	4389	4390	4389	4388	4389	0- 10	421.1	421.1	3.5,3.5
20	4248	4251	4254	4257	4258	4253	4247	4250	10- 20	1224	1645	13.7,13.7
30	4074	4075	4078	4080	4086	4081	4069	4077	20- 30	1929	3574	29.7,29.7
40	3611	3610	3610	3606	3609	3610	3611	3615	30- 40	2412	5986	49.7,49.7
50	2980	3007	3008	2974	2983	2980	2961	2959	40- 50	2569	8556	71,71
60	1616	1673	1740	1718	1721	1700	1642	1622	50- 60	2144	10699	88.8,88.8
70	469.3	463.4	489.2	481.7	481.1	472.2	473.8	465.9	60- 70	967.5	11667	96.8,96.8
80	84.83	82.54	88.42	85.37	83.61	83.66	85.85	84.39	70- 80	254.3	11921	99,99
90	1.725	1.714	1.695	1.680	1.826	1.849	1.904	1.911	80- 90	33.31	11955	99.2,99.2
100	4.436	4.424	4.331	4.290	4.698	4.747	4.855	4.830	90-100	3.279	11958	99.3,99.3
110	8.897	8.815	8.696	8.693	9.243	9.314	9.480	9.433	100-110	7.100	11965	99.3,99.3
120	13.96	13.90	13.78	13.76	14.51	14.59	14.76	14.69	110-120	11.51	11977	99.4,99.4
130	18.61	18.57	18.32	18.42	19.19	19.26	19.27	19.28	120-130	14.89	11991	99.5,99.5
140	22.58	22.53	22.54	22.38	22.85	22.95	23.06	23.02	130-140	16.09	12007	99.7,99.7
150	26.30	26.27	26.13	26.18	26.35	26.38	26.36	26.40	140-150	15.40	12023	99.8,99.8
160	29.16	29.14	29.13	29.17	29.10	29.11	29.14	29.12	150-160	12.81	12036	99.9,99.9
170	31.31	31.27	31.35	31.21	31.43	31.29	31.34	31.35	160-170	8.552	12044	100,100
180	32.54	32.63	32.61	32.74	32.68	32.68	32.67	32.68	170-180	3.042	12047	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

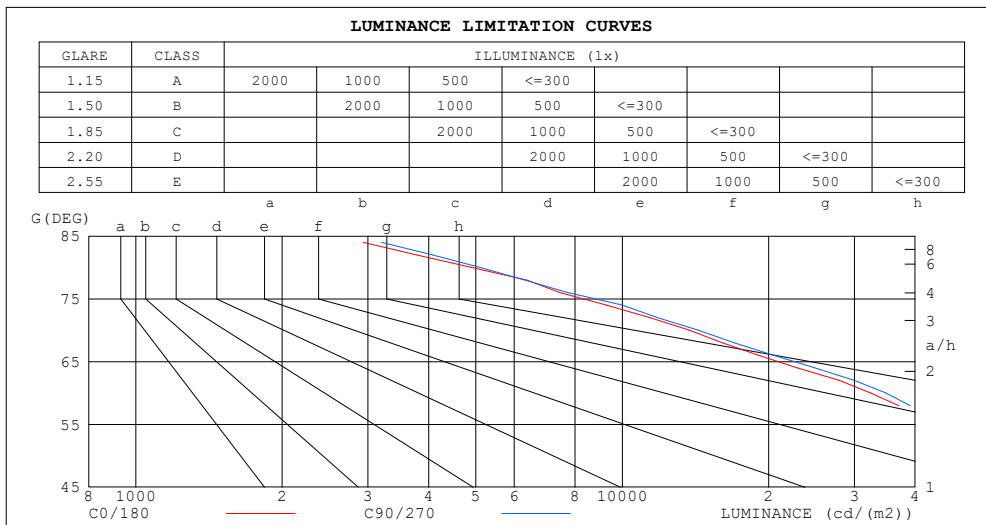

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3520	3841
80	4887	5092
75	9876	10659
70	13724	14303
65	23752	25821
60	32322	34792
55	44557	45675
50	46375	46802
45	48087	48116


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	ρw	50%	30%	10%	ρw	50%	30%	10%	ρw	50%	30%	
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.94	.96	.93	.91	.92	.90	.89	.87
2.0	.94	.88	.83	.92	.87	.82	.89	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.73	.69	.66	.64
4.0	.74	.66	.60	.73	.65	.59	.70	.64	.59	.68	.62	.58	.66	.61	.57	.55
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.50	.48
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.45	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.45	.40	.52	.45	.39	.50	.44	.39	.49	.43	.39	.37
8.0	.49	.41	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.45	.37	.32	.45	.37	.32	.44	.37	.32	.42	.36	.31	.41	.36	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

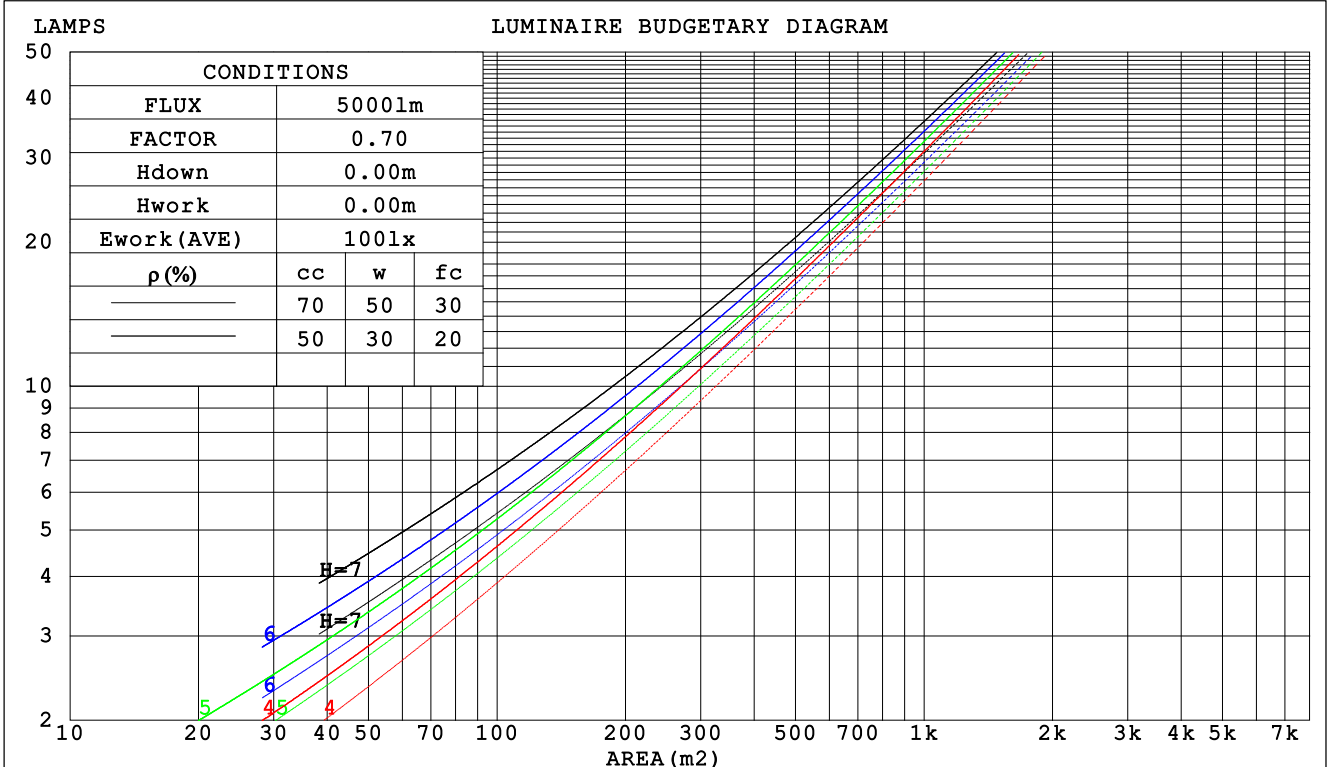

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.261	.148	.047	.253	.145	.046	.240	.138	.044	.228	.131	.042	.216	.125	.040	
2.0	.255	.140	.043	.249	.137	.042	.237	.132	.041	.227	.127	.040	.216	.122	.039	
3.0	.243	.129	.039	.238	.127	.038	.227	.123	.037	.218	.119	.037	.209	.116	.036	
4.0	.229	.119	.035	.224	.117	.035	.215	.114	.034	.206	.111	.033	.198	.108	.033	
5.0	.215	.110	.032	.211	.108	.032	.203	.105	.031	.195	.103	.031	.188	.100	.030	
6.0	.202	.101	.029	.198	.100	.029	.191	.098	.028	.184	.096	.028	.177	.093	.028	
7.0	.190	.094	.027	.186	.093	.026	.180	.091	.026	.173	.089	.026	.168	.087	.026	
8.0	.178	.087	.025	.175	.086	.024	.169	.085	.024	.164	.083	.024	.159	.081	.024	
9.0	.168	.081	.023	.165	.081	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.159	.076	.021	.156	.076	.021	.152	.074	.021	.147	.073	.021	.143	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.196	.196	.196	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.183	.162	.144	.156	.139	.124	.107	.096	.086	.062	.056	.050	.020	.018	.016	
2.0	.173	.138	.108	.148	.119	.094	.102	.082	.065	.059	.048	.038	.019	.015	.012	
3.0	.165	.120	.084	.142	.104	.073	.097	.072	.051	.056	.042	.030	.018	.014	.010	
4.0	.158	.107	.067	.136	.092	.058	.093	.064	.041	.054	.038	.024	.017	.012	.008	
5.0	.151	.096	.055	.130	.083	.048	.089	.058	.034	.052	.034	.020	.017	.011	.007	
6.0	.144	.088	.047	.124	.076	.041	.086	.053	.029	.050	.031	.017	.016	.010	.006	
7.0	.138	.081	.041	.119	.070	.035	.082	.049	.025	.048	.029	.015	.015	.009	.005	
8.0	.132	.075	.036	.114	.065	.031	.079	.046	.022	.046	.027	.013	.015	.009	.004	
9.0	.126	.070	.032	.109	.061	.028	.075	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.121	.066	.029	.104	.057	.025	.072	.040	.018	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: AHBL100W-C408-MOMX-P12-00B					TYPE:LED					WEIGHT:2.9KG				
SPEC.:4080120					DIM.: 261*261*172					SERIAL No.:001				
MFR.:					SUR.:					Shielding Angle:120				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions	Viewed crosswise					Viewed endwise								
x = 2H y = 2H	17.0	18.5	17.3	18.7	18.9	17.1	18.6	17.4	18.8	19.0				
3H	17.3	18.6	17.6	18.8	19.1	17.4	18.7	17.7	18.9	19.2				
4H	17.2	18.5	17.6	18.7	19.0	17.4	18.6	17.7	18.9	19.1				
6H	17.2	18.3	17.5	18.6	18.9	17.3	18.5	17.6	18.7	19.0				
8H	17.1	18.2	17.5	18.5	18.8	17.3	18.4	17.6	18.7	19.0				
12H	17.1	18.1	17.4	18.5	18.8	17.2	18.3	17.6	18.6	18.9				
4H 2H	17.2	18.5	17.6	18.7	19.0	17.3	18.5	17.6	18.8	19.1				
3H	17.5	18.6	17.9	18.9	19.2	17.6	18.7	18.0	19.0	19.3				
4H	17.5	18.5	17.9	18.8	19.2	17.7	18.6	18.0	18.9	19.3				
6H	17.5	18.3	17.9	18.7	19.1	17.6	18.5	18.0	18.8	19.2				
8H	17.5	18.2	17.9	18.6	19.0	17.6	18.4	18.0	18.7	19.1				
12H	17.4	18.1	17.9	18.5	18.9	17.5	18.3	18.0	18.6	19.1				
8H 4H	17.5	18.2	17.9	18.6	19.0	17.6	18.4	18.0	18.7	19.1				
6H	17.4	18.1	17.9	18.5	18.9	17.6	18.2	18.0	18.6	19.0				
8H	17.4	18.0	17.9	18.4	18.9	17.5	18.1	18.0	18.5	19.0				
12H	17.4	17.9	17.9	18.3	18.8	17.5	18.0	18.0	18.4	18.9				
12H 4H	17.4	18.1	17.9	18.5	18.9	17.5	18.2	18.0	18.6	19.1				
6H	17.4	18.0	17.9	18.4	18.9	17.5	18.1	18.0	18.5	19.0				
8H	17.4	17.9	17.9	18.3	18.8	17.5	18.0	18.0	18.4	18.9				
Variations with the observer position at spacings:														
S = 1.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.5								
1.5H	+ 0.7 / - 1.3					+ 0.7 / - 1.2								
2.0H	+ 1.2 / - 2.1					+ 1.2 / - 2.2								

CIE Pub.117, 12047 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 8.6)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	48	41	59	48	41	57	47	41	35
0.80	70	59	52	69	59	52	68	58	52	45
1.00	80	69	63	78	69	62	76	70	62	55
1.25	87	77	71	85	77	71	83	75	70	63
1.50	92	83	77	90	82	76	87	80	75	68
2.00	98	91	85	97	90	85	93	87	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	101	98	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

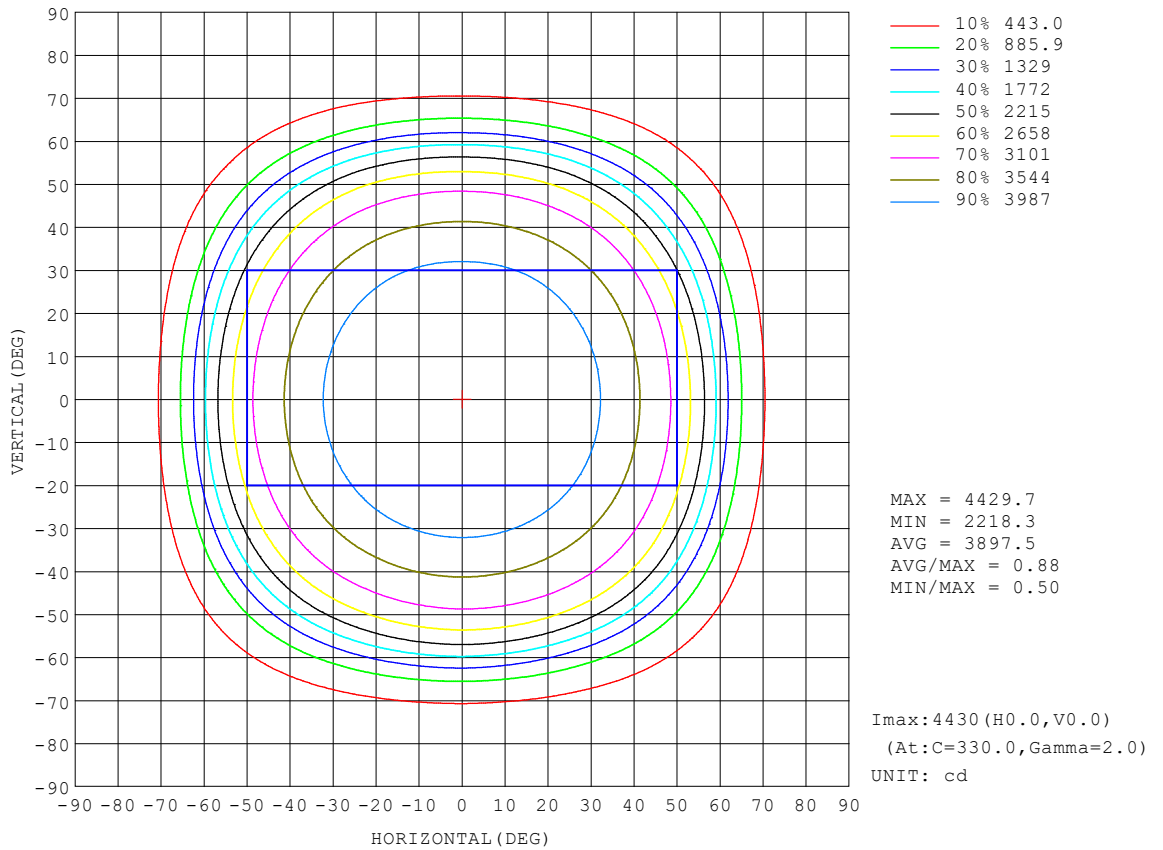


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

AAI Figure

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

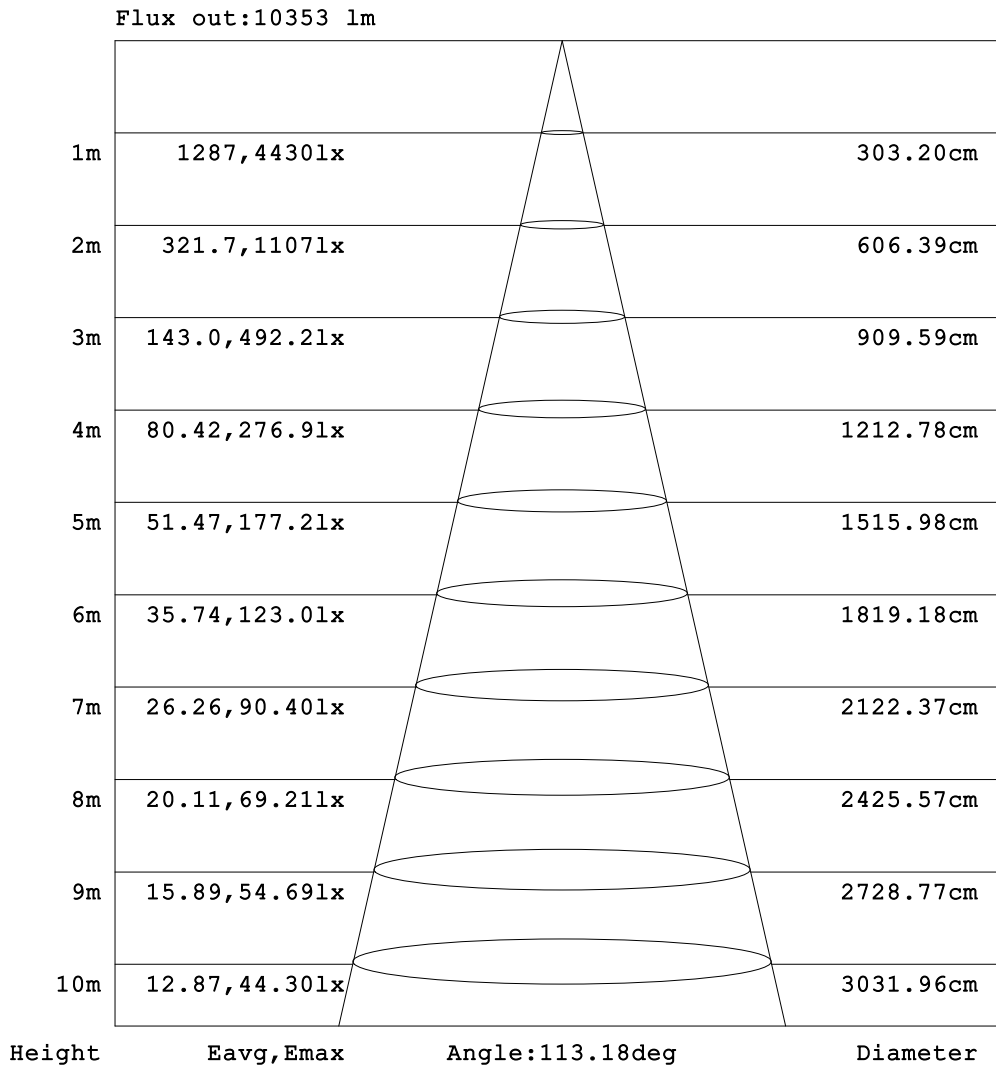


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

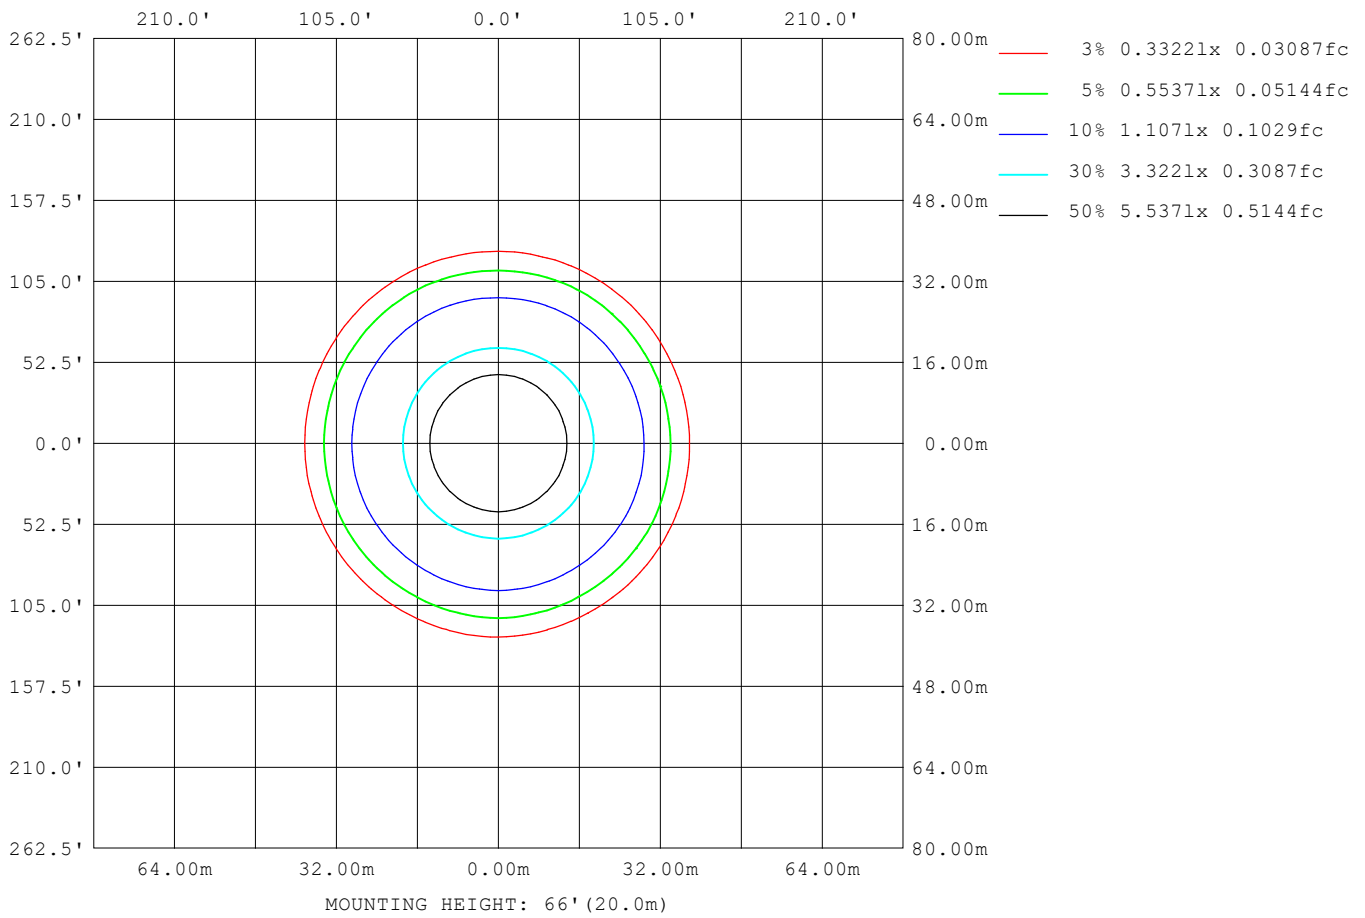

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120


AvgL	cd/m2
L_0~180 (65) av	21586
L_0~180 (75) av	8471
L_0~180 (85) av	2668
L_90~270 (65) av	22178
L_90~270 (75) av	8593
L_90~270 (85) av	2850
L_45 (65) av	21784
L_45 (75) av	8523
L_45 (85) av	2790

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Admin
Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:8.320m [K=1.0000]
Remarks:

Planar Illuminance Curve

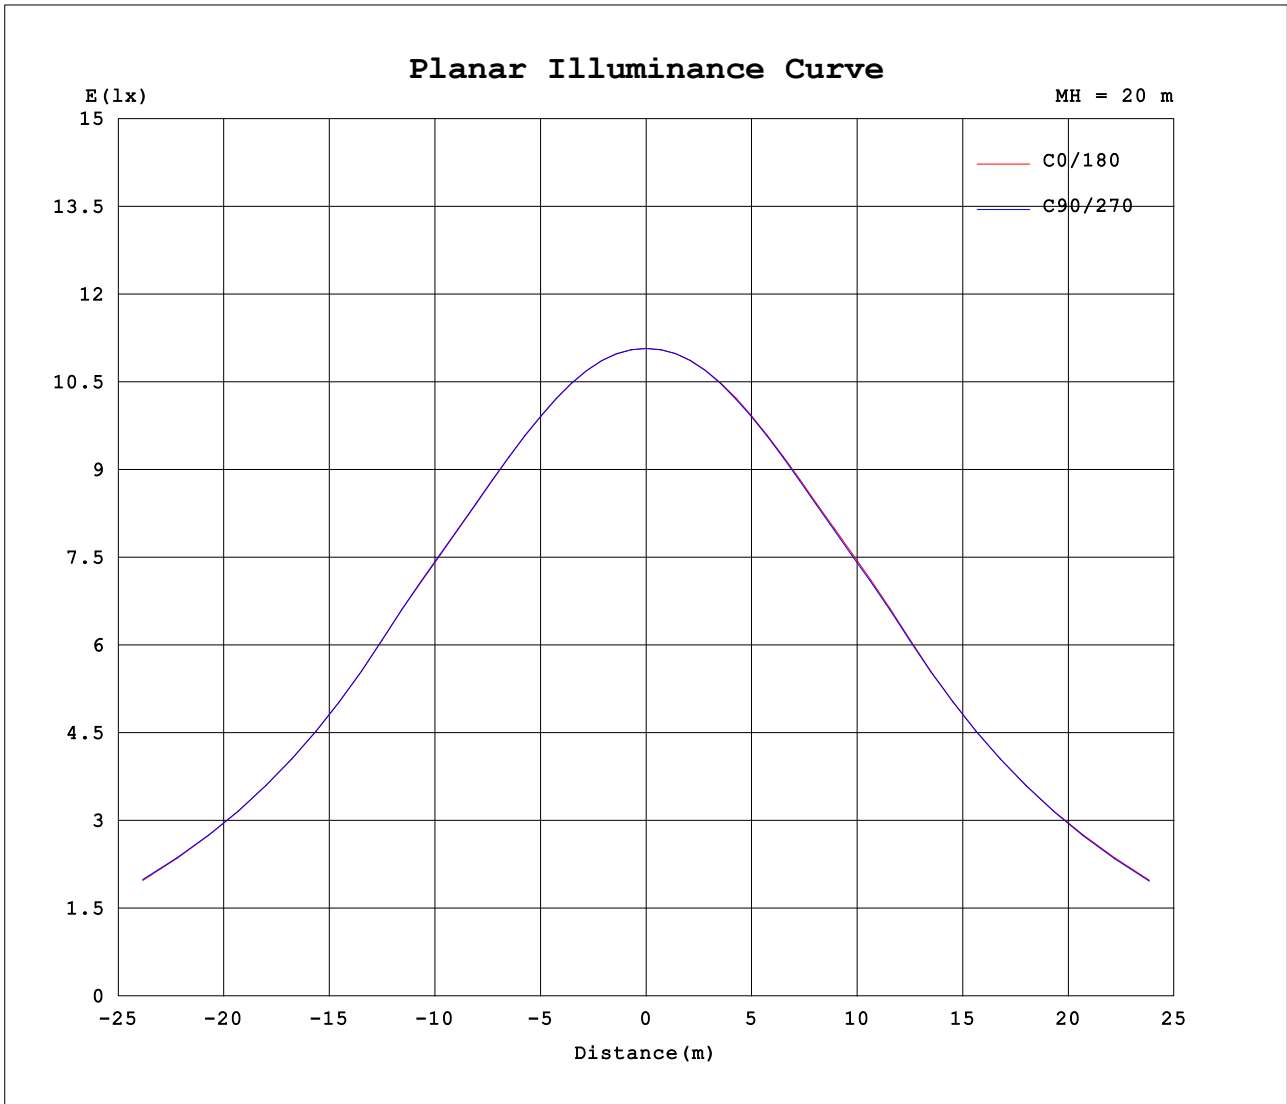

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Admin
 Test Date: 2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity: 65.0%
 Test Distance: 8.320m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: AHBL100W-C408-MOMX-P12-00B	TYPE:LED	WEIGHT:2.9KG
SPEC.:4080120	DIM.: 261*261*172	SERIAL No.:001
MFR.:	SUR.:	Shielding Angle:120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4429	4429	4429	4429	4429	4429	4429	4429	4429	4429	4429	4429							
5	4425	4426	4425	4425	4425	4425	4426	4426	4426	4426	4426	4426							
10	4388	4389	4387	4389	4388	4389	4390	4389	4389	4388	4389	4388							
15	4340	4342	4339	4343	4343	4345	4346	4343	4343	4340	4341	4341							
20	4248	4251	4251	4254	4255	4258	4258	4254	4253	4247	4250	4251							
25	4185	4186	4184	4191	4194	4201	4198	4189	4184	4181	4184	4188							
30	4074	4074	4075	4078	4078	4081	4086	4081	4081	4069	4077	4078							
35	3896	3899	3892	3897	3893	3894	3900	3899	3906	3895	3906	3899							
40	3611	3616	3605	3610	3602	3610	3609	3607	3613	3611	3614	3616							
45	3399	3410	3399	3402	3388	3403	3403	3398	3406	3396	3400	3403							
50	2980	3011	3003	3008	2973	2974	2983	2981	2979	2961	2954	2963							
55	2555	2603	2598	2620	2581	2580	2587	2566	2580	2528	2545	2517							
60	1616	1676	1670	1740	1711	1725	1721	1706	1695	1642	1647	1597							
65	1004	1028	1030	1091	1076	1079	1080	1077	1057	1044	1022	1006							
70	469	461	466	489	482	481	481	460	484	474	471	461							
75	256	253	258	276	264	275	270	248	276	254	266	257							
80	84.8	81.0	84.1	88.4	84.5	86.2	83.6	82.5	84.8	85.9	85.7	83.0							
85	30.7	31.0	31.6	33.5	33.5	34.2	32.2	32.0	33.1	33.5	34.3	32.2							
90	1.73	1.70	1.73	1.69	1.70	1.65	1.83	1.84	1.85	1.90	1.90	1.92							
95	2.55	2.53	2.52	2.49	2.47	2.44	2.73	2.73	2.77	2.82	2.84	2.84							
100	4.44	4.43	4.42	4.33	4.30	4.28	4.70	4.73	4.76	4.85	4.83	4.83							
105	6.09	6.04	6.04	5.95	5.92	5.86	6.35	6.43	6.46	6.57	6.51	6.52							
110	8.90	8.82	8.81	8.70	8.71	8.67	9.24	9.29	9.34	9.48	9.43	9.43							
115	10.8	10.8	10.8	10.7	10.7	10.6	11.3	11.4	11.4	11.6	11.5	11.5							
120	14.0	13.9	13.9	13.8	13.8	13.8	14.5	14.6	14.6	14.8	14.7	14.7							
125	15.9	15.9	15.9	15.7	15.8	15.7	16.5	16.6	16.6	16.7	16.7	16.6							
130	18.6	18.5	18.6	18.3	18.4	18.4	19.2	19.3	19.2	19.3	19.3	19.3							
135	20.2	20.2	20.2	20.1	20.0	20.1	20.7	20.8	20.8	20.9	20.9	20.9							
140	22.6	22.6	22.5	22.5	22.3	22.4	22.8	22.9	23.1	23.1	23.0	23.0							
145	24.2	24.2	24.1	24.1	23.9	24.0	24.3	24.4	24.5	24.5	24.5	24.5							
150	26.3	26.2	26.3	26.1	26.2	26.2	26.3	26.4	26.4	26.4	26.4	26.4							
155	27.5	27.4	27.5	27.5	27.5	27.5	27.6	27.5	27.5	27.5	27.5	27.5							
160	29.2	29.2	29.1	29.1	29.1	29.2	29.1	29.1	29.1	29.1	29.2	29.1							
165	30.2	30.1	30.1	30.1	30.1	30.2	30.1	30.1	30.0	30.1	30.1	30.0							
170	31.3	31.3	31.3	31.4	31.2	31.2	31.4	31.2	31.3	31.3	31.4	31.3							
175	32.0	31.9	32.0	32.0	31.8	32.0	32.0	32.0	32.1	31.9	32.0	32.0							
180	32.5	32.6	32.6	32.6	32.7	32.8	32.7	32.6	32.7	32.7	32.6	32.7							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Admin
 Test Date:2018-11-24

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:8.320m [K=1.0000]
 Remarks: